


BALL VALVES

KLINGER KHA-G
Threaded ends, full bore

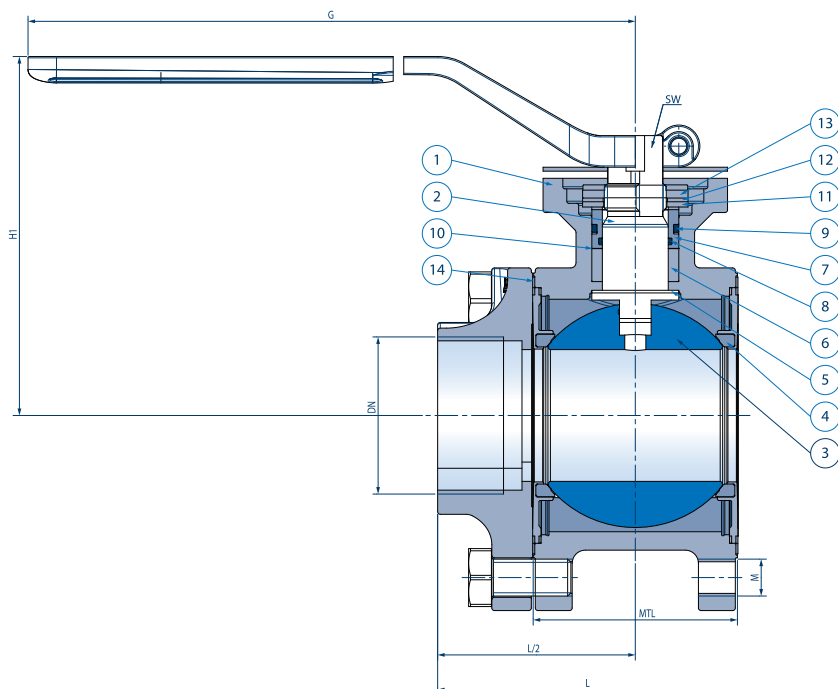

PARTS

No.	Part	Material	
		VIII	XC
1	Body	1.0619	1.4408
2	Stem	1.4104	1.4404
3	Ball	V4A	
4	Sealing element	X-FS	
5	Friction washer	Peek 583-z	
6	Sealing brush	Graphite	
7	Seal insert	1.4401	
8	O-ring	FEPM A75H	
9	O-ring	FEPM A75H	
10	Disc	1.4401	
11	Disc	1.4404	
12	Belleville washer	1.4310	
13	Stuffingbox nut	1.4404	
14	Flat gasket	KLINGERSil® C4430	

DIMENSIONS AND WEIGHTS

DN	PN		MTL	H1	G	SW	L	M	X*M	ISO 5211	kg
	VIII	XC									
1/2"	100	63	26,4	83,0	130	8	85	M6	4	F04	0,9
3/4"	100	63	35,2	96,0	160	11	95	M8	4	F04	1,5
1"	100	63	41,5	100,0	160	11	105	M8	4	F04	1,8
1 1/4"	63	40	49,5	107,5	252	14	120	M10	4	F05	3,2
1 1/2"	63	40	63,0	114,7	252	14	130	M12	4	F05	4,8
2"	40		77,5	136,2	310	17	150	M14	4	F07	7,6

STANDARDS AND CERTIFICATION

- » Fire safe according to API607 and EN10497
- » TA Luft / VDI2440
- » EN15848
- » BAM Oxygen
- » SIL2
- » EN12266-1, P10, P11, P12