


BALL VALVES

KLINGER KHA-S-XD
Welding ends, full bore

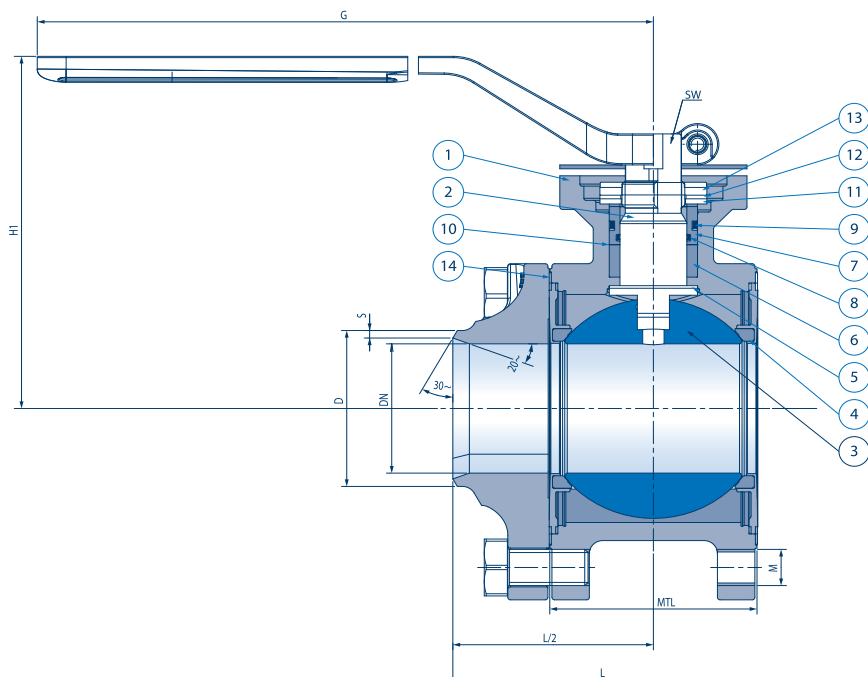

PARTS

No.	Part	Material
1	Body	1.4470
2	Stem	1.4462
3	Ball	1.4470 Fe/Cr35
4	Sealing element	1.4462 /stellite
5	Friction washer	KFC-25
6	Sealing bush	1.4404
7	Sealing insert	1.4404
8	O-ring	1.4404
9	O-ring	1.4404
10	Disc	1.4401
11	Disc	1.4404
12	Belleville washer	1.4310
13	Stuffingbox nut	1.4404
14	Flat gasket	KLINGERsil® C4430

DIMENSIONS AND WEIGHTS

DN	PN		MTL	D	S	H1	G	SW	L	M	X*M	ISO 5211	kg
	VIII	XC											
15	100	63	26,4	21,3	2,0	83,0	130	8	75	M6	4	F04	0,9
20	100	63	35,2	28,0	3,0	96,0	160	11	90	M8	4	F04	1,5
25	100	63	41,5	33,7	2,6	100,0	160	11	105	M8	4	F04	1,8
32	63	40	49,5	42,4	2,6	107,5	252	14	110	M10	4	F05	3,1
40	63	40	63,0	48,3	3,2	114,7	252	14	125	M12	4	F05	4,8
50	40		77,5	60,3	2,9	136,2	310	17	150	M14	4	F07	7,6
65	40		93,5	76,1	3,1	146,2	310	17	190	M12	6	F07	10,6
80	40		111,4	88,9	3,2	165,0	500	22	220	M16	6	F10	19,5
100	40		131,6	114,3	3,6	178,5	500	22	270	M16	6	F10	28,0
125	40		171,4	139,7	4,0	212,5	650	27	330	M16	8	F12	49,5

STANDARDS AND CERTIFICATION

- » Fire safe according to API607 and EN10497
- » TA Luft / VDI2440
- » EN15848
- » BAM Oxygen
- » SIL2
- » EN12266-1, P10, P11, P12

NOTICE: DOES NOT HAVE TO BE DISMANTLED WHEN WELDING INTO THE PIPELINE !