


BALL VALVES

KHD-3MF-SL/G-.../RPTFE

Long welding ends, full bore

ISO5211 direct mounting top flange

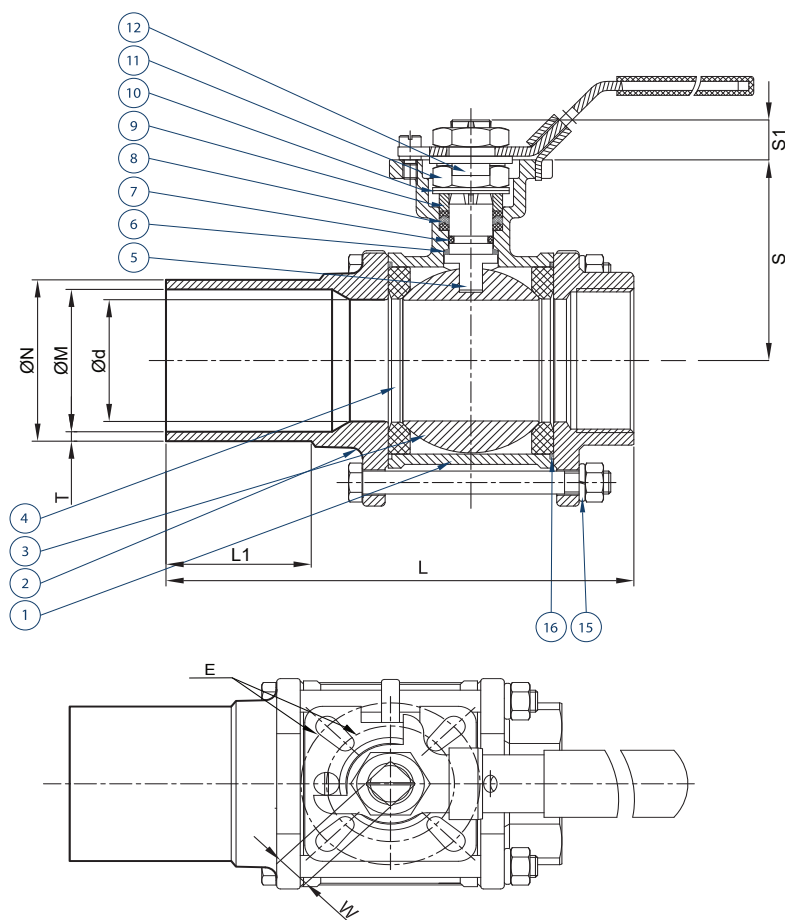

PARTS

No.	Part	Material	
		XC	VIII
1	Body	CF8M	1.0619
2	End cap	CF3M	1.0619
3	Ball	CF8M	1.4308
4*	Ball seat	PTFE/glass fiber/graphite	
5	Stem	AISI316	
6*	Thrust washer	PTFE/glass fiber/graphite	
7	O-ring	VITON	
8	Stem packing	PTFE	
9	Stem gland	AISI 304	
10	Spring washer	AISI 304	
11	Stem nut	AISI 304	
12	Stop washer	AISI 304	
13	Body bolt	AISI 304	
14	Body nut	AISI 304	
15	Washer	AISI 304	
16*	Body seal	PTFE/glass fiber/graphite	

Also available with a handle

* Option PTFE

DIMENSIONS AND WEIGHTS

DN	PN	d	L	L1	S	S1	W	M	N	T	E
15	63	15	105,5	39	42,5	9	9	17,1	21,3	2,1	F03/F04
20	63	20	110,5	32	46,5	9	9	22,7	26,9	2,1	F03/F04
25	63	25	121,0	35	56,0	11	11	29,1	33,7	2,3	F04/F05
32	63	32	138,5	33,5	60,5	11	11	37,4	42,4	2,5	F04/F05
40	63	38	158,0	43,5	77,2	14	14	43,3	48,3	2,5	F05/F07
50	63	50	175,0	40,5	84,5	14	14	54,3	60,3	3,0	F05/F07
65	63	65	220,0	54	108,7	17	17	69,1	76,1	3,5	F07/F10
80	63	80	230,5	58	116,6	17	17	81,9	88,9	3,5	F07/F10
100	63	100	272,5	59	140,0	22	22	107,3	114,3	3,5	F10/F12

MAX. PRESSURE / TEMPERATURE

