

BUTTERFLY VALVES

WOUTER WITZEL
Model EVUS DN 600 - 2200 (24" - 88")




PROPERTIES

Body type	DN 700 - 1400 (28" - 56"): U-model, between flanges /dhort construction length) drilled or threaded installaton holes, centric, rubberlined
Valve function*	Isolating valve (on/off) and/or regulating valve
Installation	Bolting between two flanges, with possibility for downstream pipe dismantling
Flange connections*	PN 10, ANSI Class 150 (Valu PN10)
Shut off pressure*	2,5 / 6 / 10 bar
Leakage rate	ISO 5208, Rate A (bi-directional tight shut off)
Face to face dimensions	ISO 5752 / EN 558
Type approvals*	PED, CCS, CSR, LRS, WRAS, GOST, LR, Kitemark, DNV NKK, RMRS, USGG, Kiwa
Actuation possibilities*	Manual, electric, pneumatic or hydraulic

* To be specified when ordering

PARTS

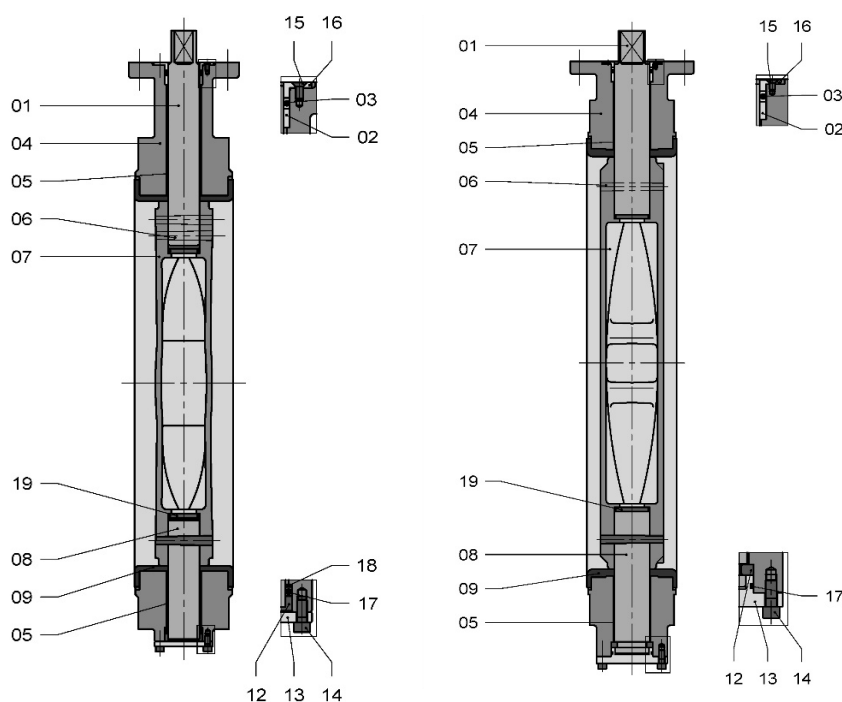


No.	Part
1	Shaft
2	Bush
3	O-ring
4	Body
5	Bearing
6	Conical pin
7	Disc
8	Shaft
9	Lining
12	Bearing
13	Cover plate
14	Screw
15	Screw
16	Flanged bush
17	O-ring
19	Sealing plate


BUTTERFLY VALVES

WOUTER WITZEL

Model EVUS DN 600 - 1000 (24" - 40")

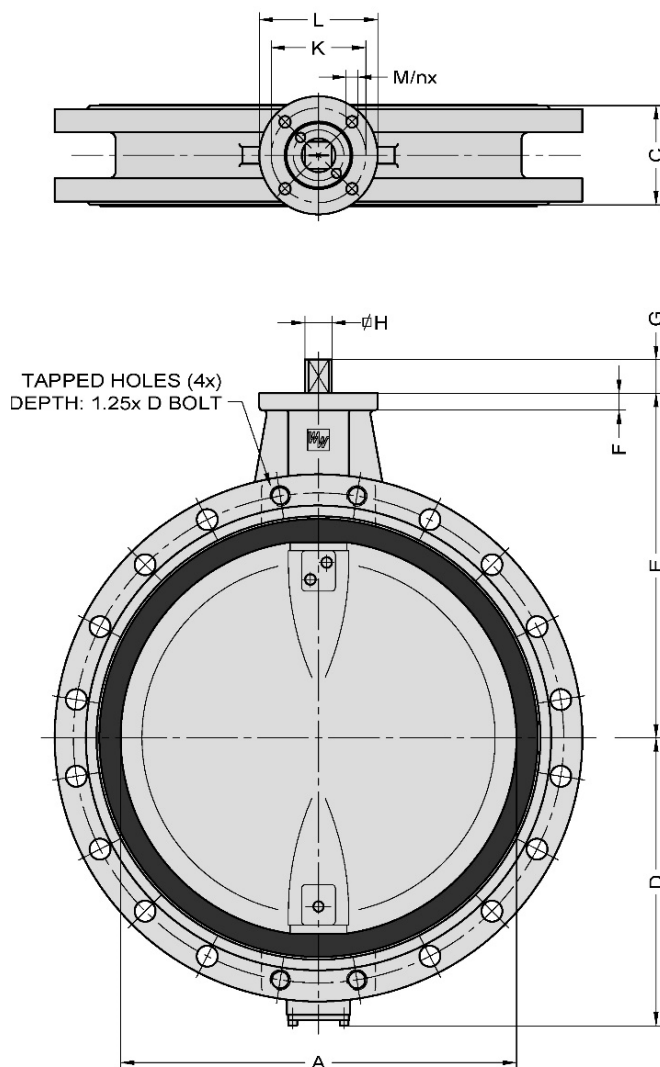

Suositeltu asento horisontaaliseen putkeen asennettaessa




DIMENSIONS AND WEIGHTS



DN	NPS	A	C	D	E	F	G	H	ISO5211	K	L	M	n	MASS ±kg
600	24"	584	154	426	510	25	50	40	F14	140	175	17	4	285
700	28"	686	164	517	560	25	60	46	F16	165	210	21	4	323
750	30"	736	190	524	585	25	60	46	F16	165	210	21	4	375
800	32"	786	190	549	610	25	60	46	F16	165	210	21	4	425
900	36"	886	203	625	690	30	90	60	F25	254	300	17	8	560
1000	40"	986	216	675	740	30	90	60	F25	254	350	17	8	760
1000	40"	986	216	675	740	30	90	60	F30	298	350	21	8	760

BUTTERFLY VALVES

WOUTER WITZEL
Model EVUS DN 700 - 1400 (28" - 56")

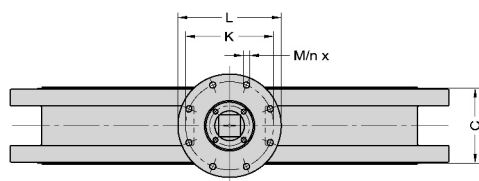

Suositeltu asento horisontaaliseen putkeen asennettaessa

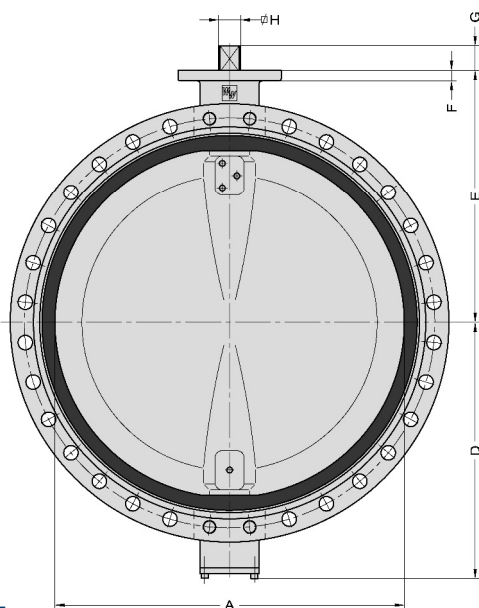

MITAT JA PAINOT

DN	NPS	A	C	D	E	F	G	H	ISO5211	K	L	M	n	MASS ±kg
1100	44"	1086	235	816	805	35	85	75	F25	298	415	21	8	900
1200	48"	1186	254	866	855	35	85	75	F30	298	415	21	8	1100
1200	48"	1186	254	866	855	35	85	75	F30	356	415	31	8	1100
1300	52"	1286	*279	916	955	35	85	75	F35	298	415	21	8	1250
1300	52"	1286	*279	916	955	35	85	75	F30	356	415	31	8	1250
1400	56"	1386	279	966	955	35	85	75	F35	356	415	31	8	1800
1400	56"	1386	279	966	955	35	100	90	F35	356	415	31	8	1800
1500	60"	1484	*318	1047	1034	50	100	90	F35	356	415	31	8	2180
1500	60"	1484	*318	1047	1034	50	120	105	F35	356	415	31	8	2180
1600	64"	1586	318	1086	1129	50	100	90	F35	356	495	31	8	2450
1600	64"	1586	318	1086	1129	50	120	105	F40	406	495	37	8	2450
1700	68"	1676	*337	1143	1126	50	120	105	F40	406	495	37	8	2500
1700	68"	1676	*337	1143	1126	50	140	120	F40	406	495	37	8	2500
1800	72"	1776	356	1192	1176	50	100	105	F40	406	495	37	8	3200
1800	72"	1776	356	1192	1176	50	120	120	F40	406	495	37	8	3200
2000	80"	1976	406	1291	1319	50	120	105	F40	406	495	37	8	3400
2000	80"	1976	406	1291	1319	50	140	120	F40	406	495	37	8	3400
2100	84"	2080	*406	1346	1399	50	120	105	F40	406	560	37	8	4800
2100	84"	2080	*406	1346	1399	50	140	120	F48	483	560	37	12	4800
2200	88"	2180	*406	1396	1419	50	140	105	F40	406	560	37	8	4470
2200	88"	2180	*406	1396	1419	50	140	120	F48	483	560	37	12	4470

* Factory standard