
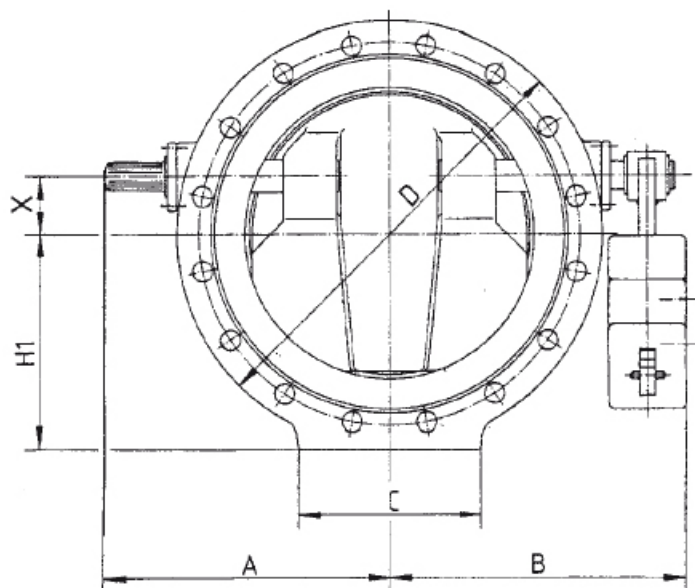


CHECK VALVES

Aseko 520 DN 150-1200
With counterweight, with flanges,
PN 10/16 (option PN 25)

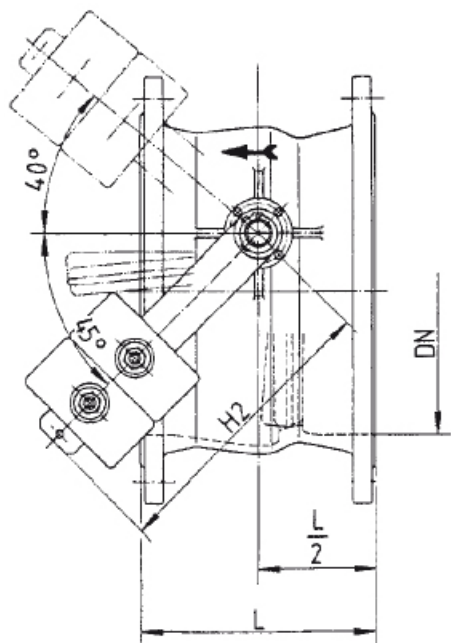

DIMENSIONS

DN	L	A	B	C	D		X	H1	H2
					PN10	PN16			
150	210	205	240	150	285	285	30	147	250
200	230	232	265	160	340	340	40	175	250
250	250	274	315	180	400	400	50	105	300
300	270	308	345	200	455	455	60	232	300
350	290	351	400	225	505	520	70	265	400
400	310	392	425	250	565	580	80	288	400
500	350	511	540	300	615	715	85	340	500
600	390	546	590	330	670	840	100	395	600
700	430	640	680	400	780	910	120	455	600
800	470	730	760	450	895	1025	135	515	800
900	510	815	830	550	1015	1125	150	562	800
1000	550	895	915	600	1115	1255	170	630	950
1200	630	1050	1065	700	1230	1485	180	745	1050

Other sizes upon order.

MATERIALS

Body GG25 or GGG40
Sealing Stainless steel
Coating Rilsan or Epoxy

Max. operating temperature +70 °C

Limit switches, hydraulic dampener and special materials available for the valves for extra price.

PRESSURE LOSS CHART

Cast iron valve, PN 10, with counterweight, horizontal mounting, medium: water, valve size DN 500

