


GLOBE VALVES

KLINGER KAD-F-XC/M

With flanges

DN 15 - 50, PN40

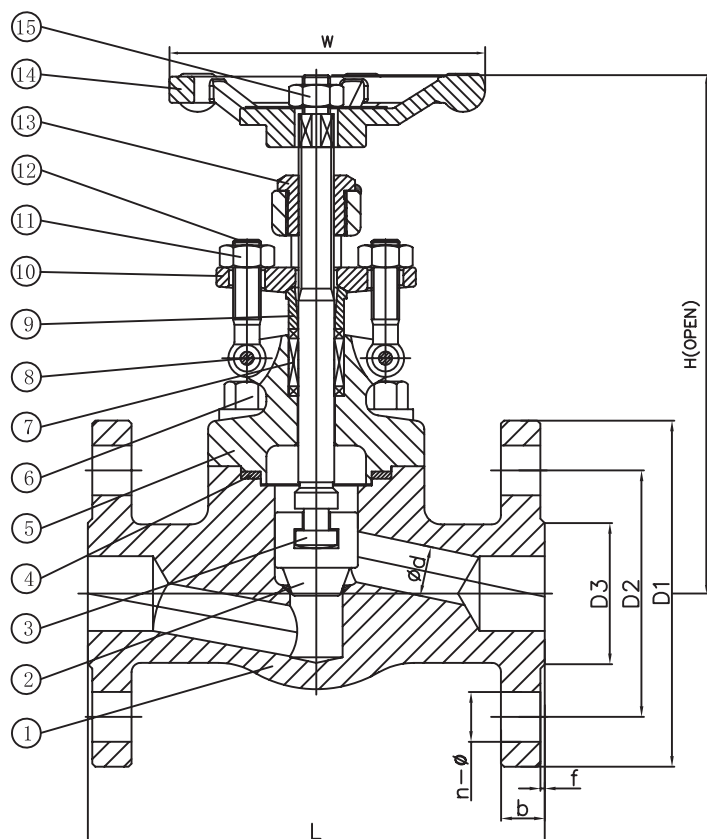

PART

No.	Part	Material
1	Body	ASTM A182 F316
2	Disc	ASTM A182 F316
3	Stem	ASTM A182 F316
4	Bonnet gasket	SS316 + Flexible Graphite
5	Bonnet	ASTM A182 F316
6	Bolt	ASTM A193 B8M
7	Packing	Flexible graphite
8	Pin	SS316
9	Stuffing box	ASTM A276 316
10	Gland flange	ASTM A193 B8M
11	Nut	ASTM A182 F316
12	Nut	ASTM A194 8M
13	Stem nut	ASTM A276 410
14	Handwheel	ASTM A197
15	Nut	AISI 1025

DIMENSIONS AND WEIGHTS

DN	d	L	D1	D2	D3	b	f	N - Ø	W	H
15	10,5	130	95	65	45	16	2	4-Ø 14	100	171
20	13,5	150	105	75	58	18	2	4-Ø 14	100	173
25	17,5	160	115	85	68	18	2	4-Ø 14	125	203
32	23	180	140	100	78	18	2	4-Ø 18	160	236
40	28,5	200	150	110	88	18	3	4-Ø 18	160	250
50	35	230	165	125	102	20	3	4-Ø 18	180	301

STANDARDS

- » Design and manufacturing according to API 602
- » Flanges according to EN 1092-1
- » Face-to-face according to DIN3202-FI
- » Pressure test and inspection according to EN12266-1
- » Temperature range -29°C ~ 425°C