


# SOLENOID VALVES

NAMUR MNF532  
5/2- and 3/2-ways

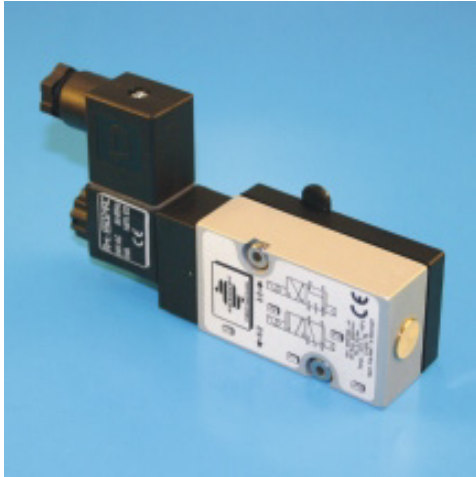


## PARTS

| Part                 | Material                 |
|----------------------|--------------------------|
| Body                 | Anodized aluminium       |
| NAMUR coupling plate | PA6-30% glass fibre      |
| Piston               | Stainless steel AISI 303 |
| Sealings             | NBR                      |
| Screws               | Stainless steel AISI 304 |


## DESCRIPTION

- » Solenoid valve NAMUR with combined 5/2- and 3/2-ways function, standard coil and connector
- » Easy change over from 5/2- to 3/2- ways operation by innovative reversing sealing
- » Single stable version
- » Manual override as standard, brass

## DIMENSIONS

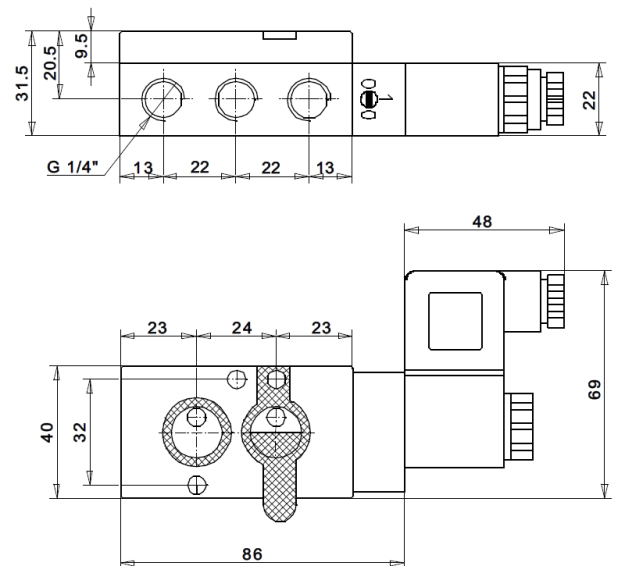

| Technical data        |                      |
|-----------------------|----------------------|
| Air entry             | G 1/4"               |
| Dimension             | 5,5 mm               |
| Air pressure          | 2 - 10 bar           |
| Temperature           | -10 - +50°C          |
| Enclosure             | IP 65 - DIN 40050    |
| Voltage, DC           | 12V, 24V             |
| Voltage, AC           | 24V, 48V, 115V, 230V |
| Power consumption, DC | 3W                   |
| Power consumption, AC | 5VA                  |
| Air flow              | 950 l/min            |

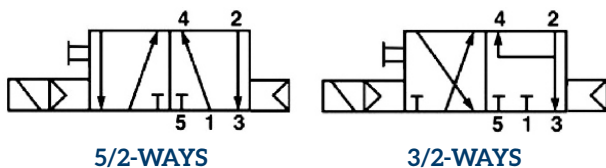

## REVERSING SEALINGS

