


STRAINERS

Y-pattern
With flanges
DN15-250, PN 10/16, FIG. 821

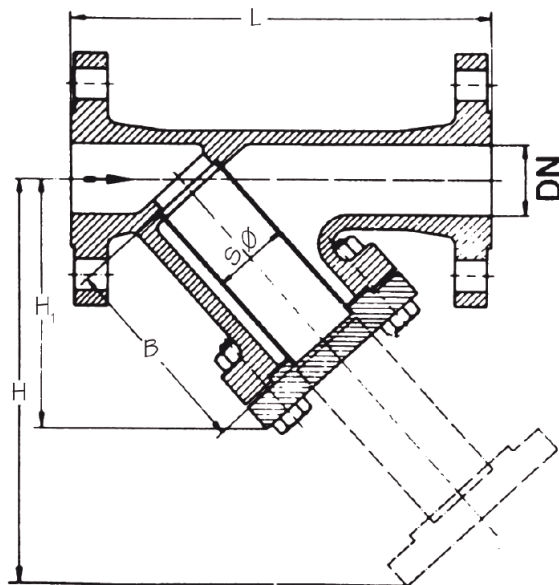

MATERIAL

Body cast iron GG 25, filter AISI316

OPTIOT

- » Special filter hole size on request
- » Soecial surface treatment with anticorrosion lacquer
- » Filter cover equipped with discharge plug or blow-off cock
- » Flanges or weld ends according to other standards (BST, ASA, etc.)
- » Other specail models on request

DIMENSIONS AND WEIGHTS

DN	L	H1	H	S	B	Hole size	Wire	kg
15	130	60	100	20	52	0,6	0,4	2
20	150	70	120	25	62	0,6	0,4	3
25	160	80	140	29	72	0,6	0,4	3,5
32	180	85	150	38	77	0,6	0,4	5,5
40	200	120	190	50	97	0,6	0,4	6,5
50	230	135	220	60	112	0,6	0,4	9,5
65	290	185	310	65	168	1,2	0,8	15
80	310	205	340	80	188	1,2	0,8	22
100	350	245	410	95	218	1,2	0,8	32
125	400	290	470	120	243	1,2	0,8	48
150	480	330	530	130	281	1,2	0,8	63
200	600	390	620	180	317	1,5	1,0	104
250	730	450	750	220	315	1,5	1,0	169

PRESSURE/TEMPERATURE

ASEKO nro	PN	Water test pressure in body aty	Operating pressure aty		
			125°C	200°C	300°C
803	10/16	25	16	15	14