


BALL VALVES

KHD-2MF-FK-XC/RPTFE


With flanges, full bore

PN16, DN15 - 200

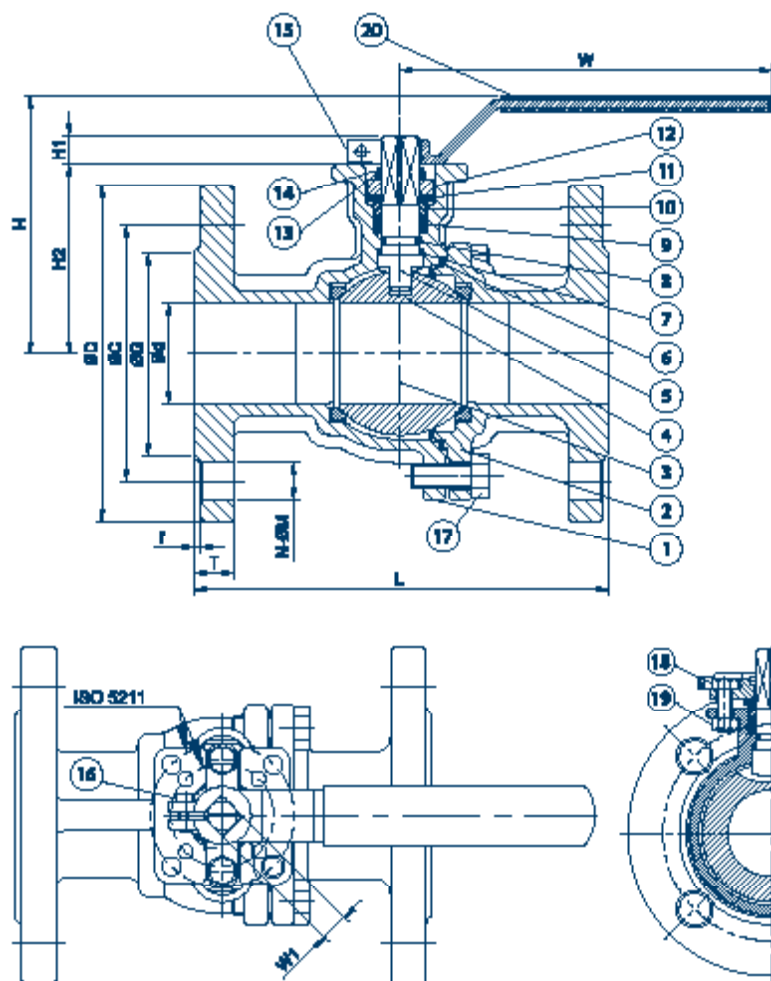

PARTS

Ref.	Part	Material
1	Body	1.4408 / 1.4308 / 1.0619
2	Cap	1.4408 / 1.4308 / 1.0619
3	Ball	1.4408 / 1.4308
4	Ball seat	PTFE
5	Stem	SS 304/SS 316
6	Body seal	PTFE
7	Thrust washer	TFM 4215
8	O-ring	VITON
9	Stem packing	PTFE
10	Gland	SS 304
11	Belleville washer	SS 301
12	Gland flange	1.4308
13	Stopper	SS 304
14	Snap ring	SS 304
15	Handle	SS 304
16	Handle bolt	SS 304
17	Body bolt	SS 304 / Carbon steel
18	Gland bolt	SS 304 / Carbon steel
19	Gland nut	SS 304 / Carbon steel
20	Handle sleeve	Plastic

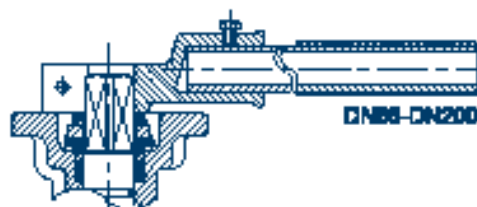

DIMENSIONS AND WEIGHTS

DN	d	L	H	H2	W	D	C	G	T	f	W1	H1	N	M	ISO 5211
15	15	115	84	50,8	123	95	65	45	14	2	9	9	4	14	F03/F04
20	20	120	94	60,5	123	105	75	58	16	2	9	9	4	14	F03/F04
25	25	125	101	67,5	153	115	85	68	16	2	11	11	4	14	F04/F05
32	32	130	108	74,0	153	140	100	78	16	2	11	11	4	18	F04/F05
40	40	140	121	86,0	183	150	110	88	16	3	14	14	4	18	F05/F07
50	50	150	127	92,5	183	165	125	102	18	3	14	14	4	18	F05/F07
65	65	170	154	113,0	352	185	145	122	18	3	17	17	4	18	F07/F10
80	80	180	165	124,5	352	200	160	138	20	3	17	17	8	18	F07/F10
100	100	190	183	149,5	397	220	180	158	20	3	22	22	8	18	F10/F12
125	125	325	229	182,0	708	250	210	188	22	3	27	27	8	18	F10/F12
150	150	350	248	201,0	708	285	240	212	22	3	27	27	8	22	F10/F12
200	200	400	304	259,0	920	340	295	268	24	3	36	36	12	22	F14

STANDARDS

- » Flanges according to DIN 2633 PN16
- » Face to face dimensions according to DIN 3202 -F4/F5