


BALL VALVES

KHD-2MF-FK-XC/RPTFE


With flanges, full bore

PN40, DN15 - 200

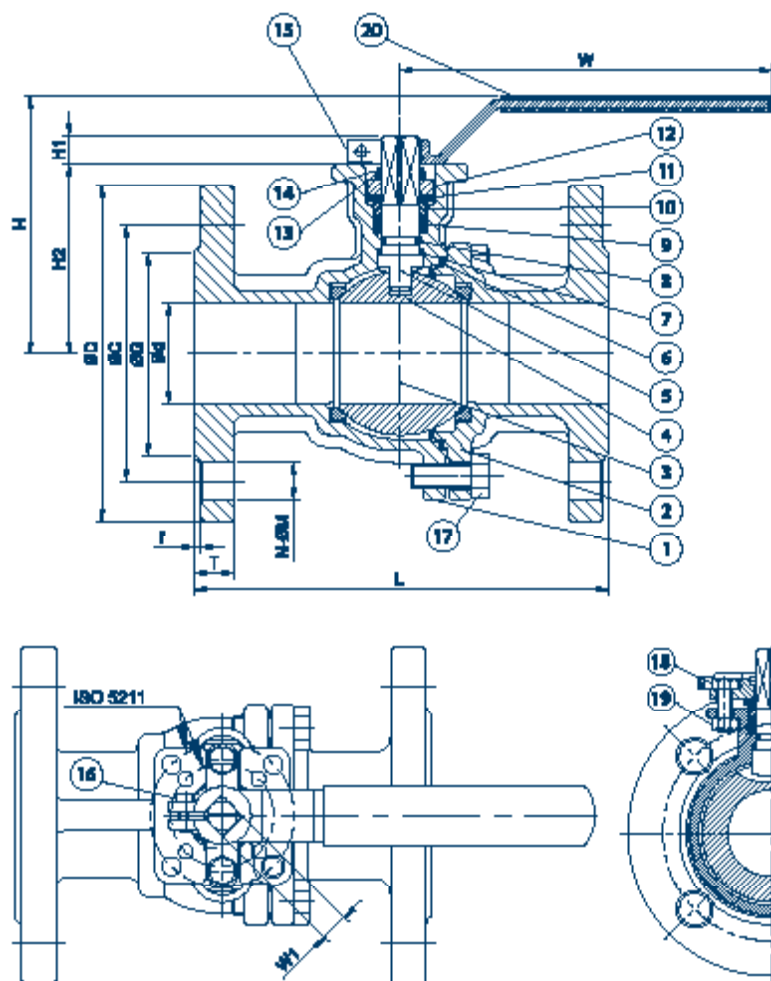

PARTS

Ref.	Part	Material
1	Body	1.4408 / 1.4308 / 1.0619
2	Cap	1.4408 / 1.4308 / 1.0619
3	Ball	1.4408 / 1.4308
4	Ball seat	PTFE
5	Stem	SS 304/SS 316
6	Body seal	PTFE
7	Thrust washer	TFM 4215
8	O-ring	VITON
9	Stem packing	PTFE
10	Gland	SS 304
11	Belleville washer	SS 301
12	Gland flange	1.4308
13	Stopper	SS 304
14	Snap ring	SS 304
15	Handle	SS 304
16	Handle bolt	SS 304
17	Body bolt	SS 304 / Carbon steel
18	Gland bolt	SS 304 / Carbon steel
19	Gland nut	SS 304 / Carbon steel
20	Handle sleeve	Plastic

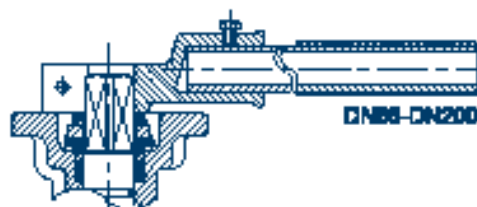

DIMENSIONS AND WEIGHTS

DN	d	L	H	H2	W	D	C	G	T	f	W1	H1	N	M	ISO 5211
15	15	115	55,0	84	123	95	65	45	16	2	9	9	4	14	F03/F04
20	20	120	66,5	94	123	105	75	58	18	2	9	9	4	14	F03/F04
25	25	125	66,5	101	153	115	85	68	18	2	11	11	4	14	F04/F05
32	32	130	74,0	108	153	140	100	78	18	2	11	11	4	18	F04/F05
40	40	140	85,5	121	183	150	110	88	18	3	14	14	4	18	F05/F07
50	50	150	92,5	127	183	165	125	102	20	3	14	14	4	18	F05/F07
65	65	170	113,0	154	352	185	145	122	22	3	17	17	8	18	F07/F10
80	80	180	124,5	165	352	200	160	138	24	3	17	17	8	18	F07/F10
100	100	190	182,5	183	397	235	190	162	24	3	22	22	8	22	F10/F12
125	125	325	229,0	182	708	270	220	188	26	3	27	27	8	26	F10/F12
150	150	350	201,0	248	708	300	250	218	28	3	27	27	8	26	F10/F12
200	200	400	259,0	304	920	375	320	285	34	3	36	36	12	30	F14

STANDARDS

- » Flanges according to DIN 2635 PN40
- » Face to face dimensions according to DIN 3202 -F4/F5