


CHECK VALVES

KRD-P-F-VII/M

Globe check valve, with flanges

DN15-200, PN16

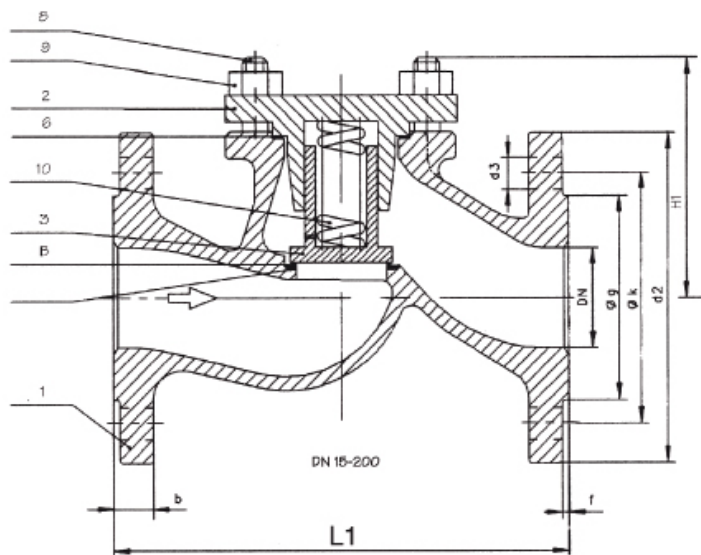

PARTS

No.	Part	Material
1	Body	GG25
2	Cover	GG25
3	Metal seat disc	DN15-65 C22.8 DN80-200 GS-C25
A	Seat ring	1.4021
B	Disc seal	1.4021
6	Seat ring	Graphite
8	Bolts	8.8
9	Hexagonal nut	8.8
10	Spring	X6CrNiMoTi17 12

OPTIONS

- » Materials: steel
- » Pressure ratings: PN 40

DIMENSIONS AND WEIGHTS

DN	Dimensions		Flanges PN 40							kg
	L1	H1	d2	k	b	g	f	n	d3	
15	130	54	95	65	14	45	2	4	14	2,1
20	150	54	105	75	16	58	2	4	14	2,7
25	160	80	115	85	16	68	2	4	14	3,8
32	180	89	140	100	18	78	2	4	18	5,5
40	200	95	150	110	18	88	3	4	18	7,4
50	230	97	165	125	20	102	3	4	18	9,5
65	290	110	185	145	20	122	3	4	18	15,0
80	310	130	200	160	22	138	3	8	18	20,0
100	350	174	220	180	24	158	3	8	18	29,5
125	400	193	250	210	26	188	3	8	18	41,0
150	480	219	285	240	26	212	3	8	22	58,0
200	600	264	340	295	30	268	3	12	22	110,0

PRESSURE/TEMPERATURE

Material	Max operating pressure at medium temperature (C°)					
	PN	-10...50	100	150	200	250
GG25	16	16	16	14	12,5	11