


STRAINERS

KFD-Y-FL
Y-type with flanged connection
ANSI class 150

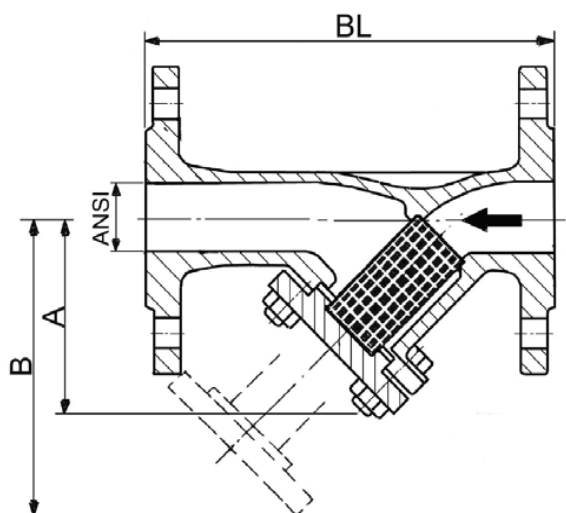

PARTS

Part	Material	
Body	WN 1.4408	GS-C 25
Cover	WN 1.4408 / 1.4571	GS-C 25 / H II
Screw	A4-70	5.6 gal
Screen	WN 1.4571 / 1.4401	
Gasket	Graphite (or other material)	

DIMENSIONS AND WEIGHTS

Size in	BL (DIN F1) mm	A mm	B mm	Mesh size mm
1/2	130	75	15	0,6
3/4	150	80	125	0,6
1	160	90	135	0,8
1 1/4	180	90	135	0,8
1 1/2	200	110	170	0,8
2	230	120	190	0,8
2 1/2	290	140	220	0,8
3	310	165	265	1,2
4	350	220	340	1,2
5	400	260	350	1,2
6	480	300	510	1,5
8	600	360	580	1,5
10	730	495	720	1,5

APPLICATION

Preferably installed in front of measuring instruments, control valves, pumps and sensitive systems.

OPERATING CONDITIONS

Flanges	150 lbs
Nominal pressure	19 bar
Nominal temperature	max 300 °C

OPTIONS

Double screen in WN 1.4571
Flanged to 300 lbs
Flanged connection acc. to DIN
Drain plug
Heatin jacket